

# Ballaconme

**Struttura:** struttura in metallo, molleggio seduta con cinghie elastiche, ricoperta con poliuretano espanso indeformabile 40/EM, 75/SR, 40/PH e rivestita con fibra poliestere 200 gr/m<sup>2</sup> + vellutino. Piede finitura a nikel

**Structure:** metal rame, springing system with elasticwebbing, padded with non-deformable polyurethane foam 40/EM/, 75/SR, 40/PH and covered with polyester fibre 200 gr/m<sup>2</sup> + velveteen. Steel feet with nikel finish.


**Sedile:** in piuma d'oca vergine con inserto in poliuretano espanso indeformabile T 35/S.







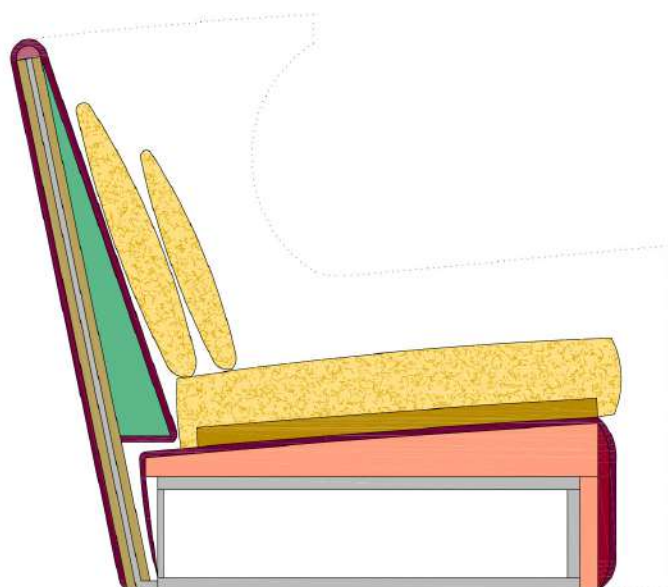



**Seat:** in non-deformable polyurethane foam insert T35/S and covered with natural goose feather

**Rivestimenti:** il modello è realizzabile in tessuto o pelle.  
covers can be made with fabric or leather.

## Covers:

POLIURETANO ESPANSO SENZA C.F.C.  
POLYURETHANE FOAM C.F.C. FREE



-  Piuma d'oca vergine  
Natural goose feather
-  F.P. 200 gr/ m<sup>2</sup> + vellutino.  
P.F.200 gr/m<sup>2</sup>+ velveteen.
-  Poliuretano T/25S (3,2kPa)  
Polyurethane T/25S (3,2kPa)
-  Poliuretano T/18S (1,5 kPa)  
Polyurethane T/18S (1,5 kPa)
-  Poliuretano T 35/S (3,8 kPa)  
Polyurethane T 35/S (3,8 kPa)
-  Poliuretano 75/SR (14,0 kPa)  
Polyurethane 75/SR (14,0 kPa)
-  Poliuretano 40/EM (3,9 kPa)  
Polyurethane 40/EM (3,9 kPa)
-  Poliuretano 40/PH (8,0 kPa)  
Polyurethane 40/PH (8,0 kPa)
-  Struttura metallo  
Metal frame
-  Piede metallo  
Metal feet

**Ballaconne**

Tessuto		Fabric		Pelle - Tessuto		Leather - Fabric	
1	2	3	SUPER	A	B	C	EXTRA

Poltrona cm 90


0

0

0

0

Armachair 35,4"



mt.9,00

Cuscino a saponetta cm.50x42

0

0

0

0

Loose pillow 19,6"x16,5"



mt.0,60

Cuscino a saponetta cm.65x50

0

0

0

0

Loose pillow 25,6"x19,6"

