

# AURORA Quinti®



Advanced directional armchair from Quinti collection. The materials used are high level, comfortable and long lasting over time. Quinti is made in Italy, certified n° 290.058.V.

## **Base**

---

1. Die-cast aluminum of 670mm "TREND"
2. cantilever structure, sled base

## **Castors**

---

Double tread diam 50 mm, standard or rubberized, both can be free [standard] or self-braking. The feet in polyamide are interchangeable to the castors with the same locking pin at the base.

## **Elevation**

---

All Quinti's gas columns are in accordance with the DIN4550 norm and they exceed the fourth level.

## **Mechanics**

---

**M5** the standard configuration of the chair supposes a tilt single lever mechanism with gas command, height and block in operative position. It has a wheel for the variation of the tilt rigidity. The main body is entirely made out of die-cast aluminum

**M4** the point of rotation of this mechanism is advanced. The blocking lever allows the blocking process in 3 positions with a backstop system of the seat. It has a wheel for the variation of the tilting rigidity. The main body is entirely made out of shiny or black die-cast aluminum.

**M3** [optional] Tilting Mechanism Plus advanced which allows the regulation of seating height, free tilt of backrest with block on 4 positions. Regulation of tilting tension, shiny aluminum.

## **Armrests**

---

1. Couplet of armrests in mirror chromed steel
2. Couplet of armrests completely covered

## **Seat & Backrest**

---

Seat and backrest are made of a monocoque multiplayer beech of 12 mm, upholstered and covered. Available both in the high and short versions.

## **Upholsters**


---

Density of 50 and Thickness of 5 cm, resonated and double upholsters and covered .

# AURORA **Quinti**<sup>®</sup>

## DIMENSIONS

---

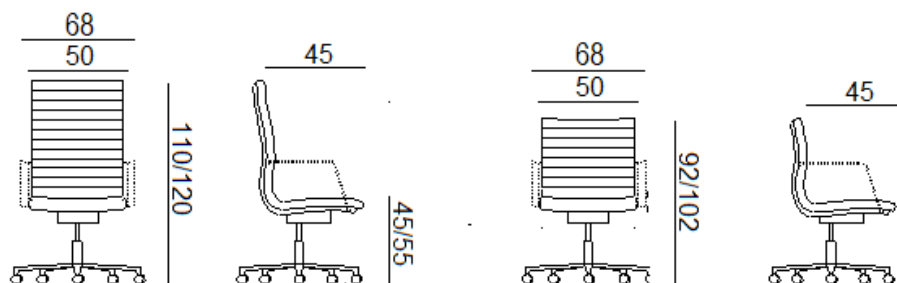

## UPHOLSTERY

---

**BIO-EXPO**  
**CATEGORY 2**  
300 gr/mt2  
100% Propitex FR bacteriostatic  
Class 1 UNI EN ISO 354:2003  
100.000 +/- 10% cycles Martindale

**EXTREME**  
**CATEGORY 2**  
350 gr/mtl  
100% Xtreme FR  
Class 1 , EN 1021-1/2  
100.000 +/- 10% cycles Martindale

**LASER**  
**CATEGORY 2**  
560 gr/mtl  
100% Polyester FR  
Class 1  
80.000 +/- 10% cycles Martindale

**ECOPELLE**  
**CATEGORY 2**  
630 gr/mt2  
83% PVC, 17% Synthetic  
ISO 379-DIN75200-CSERF4/83 10%  
cycles Martindale

**ERA**  
**CATEGORY 3**  
448 gr/mtl  
100% Trevira CS  
Class 1 UNI EN ISO 354:2003  
100.000 +/- 10% cycles Martindale

**LASER PLUS**  
**CATEGORY 3**  
630 gr/mtl  
100% Polyester FR Trevira  
Classe1 , 4.000 +/- cycles Martindale

**ECOPELLE SOUL**  
**CATEGORY 3**  
760 gr/mt2  
Superficies 100% POLIURETANO,  
Base Polyester 85%,17% Cotton  
EN1021-1/BS5852 PART 1  
>100.000 EN ISO 5470-2

**MELANGE**  
**CATEGORY 3**  
390 g/lin.m  
100% Trevira CS  
Class 1  
80.000 +/- 10% cycles Martindale

**JET**  
**CATEGORY 3**  
365 +/- 5% g/lin.m  
100% Polyester FR  
Class 1  
80.000 +/- 10% cycles Martindale

**ECOPELLE SISTEMA PRO**  
**CATEGORY 3**  
710 gr/mt2  
Surface 93% PVC  
Base Polyester 28%  
CLASSE1  
100.000 CICLI

**ECOPELLE VITAX**  
**CATEGORY 3**  
850 gr/mt2  
Surface 98% PVC 2% PU  
Base cotton 100%  
CLASSE 1  
100.000 CICLI

**ONE RECICLE**  
**CATEGORY 3**  
525 gr/mt2  
100% recycled polyester  
Base cotton 100%  
CLASSE 1IM  
100.000 CICLI

**LANA**  
**CATEGORY 5**  
500 gr/mt2  
75% Lana, 25% polyamide  
Class 1  
100.000 cycles Martindale

**PELLE**  
**CATEGORY 5/6**  
620 g/lin.m  
100% Cow leather  
Class 1, EN 1021-1/2

**PIED POULE**  
**CATEGORY 6**  
550 g/lin.m  
66% cotton, 34% Polyester  
35.000 % cycles Martindale

**EUROPOST 2**  
**CATEGORY 6**  
710 g/lin.m  
63% PU, 16% CO, 21% PL  
Ini1975 CLASS1emme,UNI9175/FA  
50.000% cycles Martindale

**PREMIUM /ELEGANCE**  
**CATEGORY 7**  
100% First quality cow leather  
Thickness 1,2/1,4 mm  
EN1021-1/2

**STEELCUT TRIO**  
**CATEGORY 7**  
770 g/lin.m  
90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale

**REMIX**  
**CATEGORY 7**  
415 g/lin.m  
90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale

**VELLUTO DECONTRACTE'**  
**CATEGORY 7**  
590 g/lin.m  
19% CO, 61% PC,10% PL, 10%VI  
40.000 % cycles Martindale

**MERIT**  
**CATEGORY 7**  
500g/lin.m  
76% Polyester Recycled  
24% Polyester  
EN 1021-1/2  
85.000 % cycles Martindale

**VELLUTO**  
**CATEGORY 8**  
600 g/lin.m  
100.000 % PL Flame retardant

**PELLE SOFT**  
**CATEGORY 8**  
100% Cow leather Thickness,8-2 mm  
Aniline treatment – First quality  
EN1021-1/2

## **USAGE AND CARE**

---

For a proper maintenance of the products and to maintain unchanged the characteristics of the materials, we recommend to follow some very simple care instructions.

### **FABRICS**

Cleaning: check the dedicated selection written on the color Swatch card. Usage: it is recommended to pay attention to the fabrics as they can be easily cut or ripped.

### **LEATHERS**

Cleaning: clean with a white wet cloth with water. We recommend to use high quality products for the cleaning of the leather and to follow carefully the instructions of the manufacturer. In doubt, try out the product on a hidden part and wait at least 24 hours for the occurrence of any problems. Usage: remember that the leather is a delicate material therefore, it is recommended to pay particular attention while using.

### **WOODS**

Cleaning: clean with a soft and wet cloth with warm water. We always recommend to dry immediately after the cleaning process. All liquids or other residue must be removed in order to avoid the absorption. Usage: wooden surfaces, being a natural material, could be affected by an alteration of the color shade during time and use. We also remind that wooden surfaces cannot bear with high temperatures if placed directly on the wooden top.

### **METALS**

Cleaning: both steel or aluminum surfaces, and painted ones, must be cleaned with a soft and wet cloth with hot water. For the most persistent stains, a small amount of liquid soap diluted in water may be used. We always recommend to dry immediately with a soft cloth or a leather one after the cleaning process. Never using cleaning products for steel, chlorine, bleach or other strong detergents. It is not recommended to use abrasive creams, score pads and abrasive sponges that can scratch the metal surfaces. Usage: pay attention to the stains of food such as coffee, coke, fruit juices that can leave indelible marks on the surface.

### **WARRANTY**

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.