

## B-NET 2.0

# Quinti®



High backrest task armchair by Quinti collection. The armchair exceeds the minimum requirements of DL 626/94, and DL.81. It complies with EN1335B and is 1IM certified.

### **Bases**

---

1. Black polypropylene base "LOOP". [d. 600]
2. Polished aluminum base "LOOP". [d. 680]
3. White polypropylene base "TREND". [d. 680]

### **Castors & feet**

---

Double tread with 65mm standard diameter, or rubberized castors. Both can be self-braking or move unobstructedly (standard version).

The polyamide legs are interchangeable to the castors with the same pivot of base assembling.

### **Elevation**

---

All the Quinti gas columns comply with the DIN 4550 norm and exceed the 4° level

### **Mechanics**

---

BNET 2.0 is created in only one version of mechanism:

**M12** The Synchron Mechanism is available in black steel. It enables the adjustment in height, the synchronized adjustment of the backrest inclination with the anti-shock system, lockable in 2 positions

### **Armrests**

---

The chair is available both with or without armrests. They are available also in the adjustment in height version, 3D adjustable with soft pad, or fixed.

### **Seat & backrest**

---

**Seat.** It is created with high-resistance polypropylene and 2 steel bars; properly stuffed with high-density polyurethane and then upholstered with all the fabrics of Quinti Colours System.

**Backrest.** It is made of tubular metal, diameter 16mm, which is attached to the mechanism through a blade. The backrest structure is covered with mesh and is provided with adjustable in height lumbar support.

### **Accessories**

The chair has a seat translator

### **Stuffing**

---


The chairs are made of indeformable high-density expanded polyurethane. Thickness 50mm.

# B-NET 2.0

# Quinti®

## DIMENSIONS

---

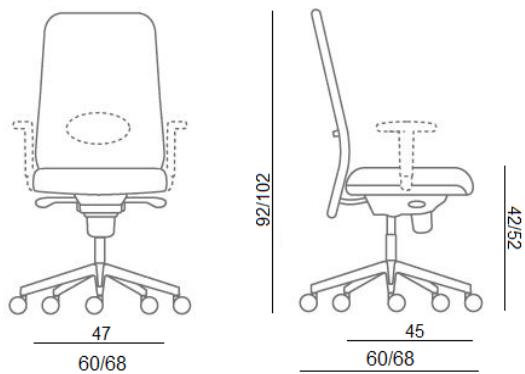

## B-NET 2.0

### UPHOLSTERY

---

**CREPE'****CATEGORY 1**

350 gr/mtl

100% Polyester Class 1 ,EN1021/1-2  
50.000 +/- 10% cycles**BIO-EXPO****CATEGORY 2**

300 gr/mt2

100% Propitex FR bacteriostatic  
Class 1UNI EN ISO 354:2003  
100.000 +/- 10% cycles Martindale**EXTREME****CATEGORY 2**

350 gr/mtl

100% Xtreme FR  
Class 1 , EN 1021-1/2  
100.000 +/- 10% cycles Martindale**LASER****CATEGORY 2**

560 gr/mtl

100% Polyester FR  
Class 1  
80.000+/- 10% cycles Martindale**ECOPELLE****CATEGORY 2**

630 gr/mt2

83% PVC, 17% Synthetic  
ISO 379-DIN75200-CSERF4/83 10%  
cycles Martindale**ERA****CATEGORY 3**

448 gr/mtl

100% Trevira CS  
Class 1UNI EN ISO 354:2003  
100.000 +/- 10% cycles Martindale**LASER PLUS****CATEGORY 3**

630 gr/mtl

100% Polyester FR Trevira  
Class1 , 4.000 +/- cycles Martindale**ECOPELLE SOUL****CATEGORY 3**

760 gr/mt2

Superficies 100% POLYURETHANE,  
Base Polyester 85%,17% Cotton  
EN1021-1/BS5852 PART 1  
>100.000 EN ISO 5470-2**GABRIEL MESH**

510 gr. gr/mtl

100% Polyester / Polyester  
BS EN 1021-1:2014  
70.000 / rub**GOAL MESH**

350 gr/mq

100%Polyester  
100.000 Martindale cycles**MELANGE****CATEGORY 3**

390 g/lin.m

100% Trevira CS  
Class 1  
80.000 +/- 10% cycles Martindale**JET****CATEGORY 3**

365+/- 5% g/lin.m

100% Polyester FR  
Class 1  
80.000+/- 10% cycles Martindale**ECOPELLE SISTEMA PRO****CATEGORY 3**

710 gr/mt2

Surface 93% PVC  
Base Polyester 28%  
CLASS1  
100.000 CYCLES**ECOPELLE VITAX****CATEGORY 3**

850 gr/mt2

Surface 98% PVC 2% PU  
Base cotton 100%  
CLASS 1  
100.000 CYCLES**ONE RECICLE****CATEGORY 3**

525 gr/mt2

100% recycled polyester  
Base cotton 100%  
CLASSE 1IM  
100.000 CYCLES**LANA****CATEGORY 5**

500 gr/mt2

75% Lana, 25% polyamide  
Class 1  
100.000 cycles Martindale**PELLE****CATEGORY 5/6**

620 g/lin.m

100% Cow leather  
Class 1, EN 1021-1/2**PIED POULE****CATEGORY 6**

550 g/lin.m

66% cotton, 34% Polyester  
35.000 % cycles Martindale**EUROPOST 2****CATEGORY 6**

710 g/lin.m

63% PU, 16% CO, 21% PL  
Ini1975 CLASS1emme,UNI9175/FA  
50.000% cycles Martindale**PREMIUM /ELEGANCE****CATEGORY 7**

100% First quality cow leather

Thickness 1,2/1,4 mm  
EN1021-1/2**STEELCUT TRIO****CATEGORY 7**

770 g/lin.m

90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale**REMIX****CATEGORY 7**

415 g/lin.m

90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale**VELLUTO DECONTRACTE'****CATEGORY 7**

590 g/lin.m

19% CO, 61% PC,10% PL, 10%VI  
40.000 % cycles Martindale**MERIT****CATEGORY 7**

500g/lin.m

76% Polyester Recycled  
24% Polyester  
EN 1021-1/2  
85.000 % cycles Martindale**VELLUTO****CATEGORY 8**

600 g/lin.m

100.000 % PL Flame retardant

**PELLE SOFT****CATEGORY 8**

100% Cow leather Thickness,8-2 mm

Aniline treatment – First quality  
EN1021-1/2

---

### USAGE AND MAINTENANCE

---

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

#### **FABRICS**

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

#### **WOODS**

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

#### **METALS**

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

#### **WARRANTY**

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.