

Armchair for conference, illustrated in the figure, is created with beech wood monoshell, characterized by its divided backrest and its die-cast aluminum structure. It is stackable up to 50 pieces, and appropriated for contract areas, waiting and community.

The seat exceeds requirements for the test report EN 1728

#### Base

The structure has 4 die-cast aluminum with anti-noise rubber-pads. it is made with a section which enable the "infinite" stacking.

The base is produced with die-cast polished aluminum, available with or without armrests, and armchair with anti-panic writing table, made of black polypropylene.



#### Seat and backrest

Bridge is available in two versions.

Exposed multiplayer beech monocoque is also available in approved CL1 version.

The illustrated single-shell, made of multiplayer beech, is stuffed with polyurethane foam, thickness 2cm. d 35, and covered. It is available also with fire-retardant rubber, approved 1M

The seat exceeds requirements for the test report EN 16139

The 2-3-4 seats bench is available on both versions. The seats are hooked, with specific supports, to a metal beam with section 80x40 mm, anchored on polished die-cast aluminum trestle legs.

Dimensions bench L120-175-238 /46 P 61/40 H 81/47



**ACCESSORIES**

---

Aluminum armrest with writing table made by black polypropylene and anti-panic hook.



Practical chromatic plate which connects the two edges of backrests. It functions also as a handle, which makes all the structure more prehensible.



Trolley useful for the chairs storage.



Hook, used to align chairs, is created with chromed wire, 5mm diameter, and it is set with two nylon elements under the seat. It allows alignment with both chairs with writing table and without. The hook is resealable if not used, to allow the stacking of the chairs.



65 cm space between two chairs hooked without armrests


Spacer-rows plate is a laser cut plate with a bent flange, thickness 2,5mm. On the flange there is a hole for a 4mm self-threading screw, placed on the inside of the leg. It allows the bare to be attached to the frame. This version creates 900 mm space between each row.



**BRIDGE** Orlandini Design **Quinti**<sup>®</sup>

**DIMENSIONS**

---

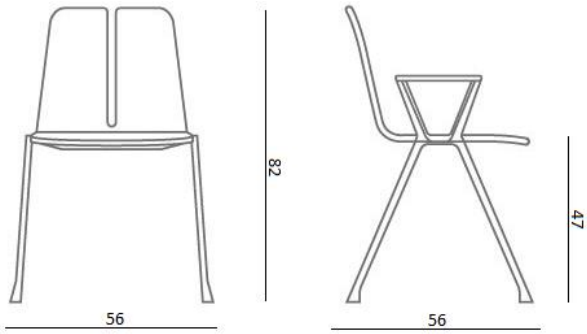

**CREPE'**

**CATEGORY 1**

350 gr/mtl

100% Polyester Class 1 ,EN1021/1-2  
50.000 +/- 10% cycles

**BIO-EXPO**

**CATEGORY 2**

300 gr/mt2

100% Propitex FR bacteriostatic  
Class 1 UNI EN ISO 354:2003  
100.000 +/- 10% cycles Martindale

**EXTREME**

**CATEGORY 2**

350 gr/mtl

100% Xtreme FR  
Class 1 , EN 1021-1/2  
100.000 +/- 10% cycles Martindale

**LASER**

**CATEGORY 2**

560 gr/mtl

100% Polyester FR  
Class 1  
80.000 +/- 10% cycles Martindale

**ECOPELLE**

**CATEGORY 2**

630 gr/mt2

83% PVC, 17% Synthetic  
ISO 379-DIN75200-CSERF4/83 10%  
cycles Martindale

**ERA**

**CATEGORY 3**

448 gr/mtl

100% Trevira CS  
Class 1 UNI EN ISO 354:2003  
100.000 +/- 10% cycles Martindale

**LASER PLUS**

**CATEGORY 3**

630 gr/mtl

100% Polyester FR Trevira  
Classe1 , 4.000 +/- cycles Martindale

**ECOPELLE SOUL**

**CATEGORY 3**

760 gr/mt2

Superficies 100% POLIURETANO,  
Base Polyester 85%,17% Cotton  
EN1021-1/BS5852 PART 1  
>100.000 EN ISO 5470-2

**MELANGE**

**CATEGORY 3**

390 g/lin.m

100% Trevira CS  
Class 1  
80.000 +/- 10% cycles Martindale

**JET**

**CATEGORY 3**

365 +/- 5% g/lin.m

100% Polyester FR  
Class 1  
80.000 +/- 10% cycles Martindale

**ECOPELLE SISTEMA PRO**

**CATEGORY 3**

710 gr/mt2

Surface 93% PVC  
Base Polyester 28%  
CLASSE1  
100.000 CICLI

**ECOPELLE VITAX**

**CATEGORY 3**

850 gr/mt2

Surface 98% PVC 2% PU  
Base cotton 100%  
CLASSE 1  
100.000 CICLI

**ONE RECICLE**

**CATEGORY 3**

525 gr/mt2

100% recycled polyester  
Base cotton 100%  
CLASSE 1IM  
100.000 CICLI

**LANA**

**CATEGORY 5**

500 gr/mt2

75% Lana, 25% polyamide  
Class 1  
100.000 cycles Martindale

**PELLE**

**CATEGORY 5/6**

620 g/lin.m

100% Cow leather  
Class 1, EN 1021-1/2

**PIED POULE**

**CATEGORY 6**

550 g/lin.m

66% cotton, 34% Polyester  
35.000 % cycles Martindale

**EUROPOST 2**

**CATEGORY 6**

710 g/lin.m

63% PU, 16% CO, 21% PL  
Ini1975 CLASS1emme,UNI9175/FA  
50.000% cycles Martindale

**PREMIUM /ELEGANCE**

**CATEGORY 7**

100% First quality cow leather

Thickness 1,2/1,4 mm  
EN1021-1/2

**STEELCUT TRIO**

**CATEGORY 7**

770 g/lin.m

90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale

**REMIX**

**CATEGORY 7**

415 g/lin.m

90% New wool worsted, 10% Nylon  
Class 1, EN 1021-1/2  
100.000 % cycles Martindale

**VELLUTO DECONTRACTE'**

**CATEGORY 7**

590 g/lin.m

19% CO, 61% PC,10% PL, 10%VI  
40.000 % cycles Martindale

**MERIT**

**CATEGORY 7**

500g/lin.m

76% Polyester Recycled  
24% Polyester  
EN 1021-1/2  
85.000 % cycles Martindale

**VELLUTO**

**CATEGORY 8**

600 g/lin.m

100.000 % PL Flame retardant

**PELLE SOFT**

**CATEGORY 8**

100% Cow leather Thickness,8-2 mm

Aniline treatment – First quality  
EN1021-1/2

## USAGE AND MAINTENANCE

---

In order to have an optimal maintenance of the products and to preserve the characteristics of the materials by which they are made, it is recommended the following course of action.

### **FABRICS**

Cleaning: check the dedicated selection written on the color Swatch card.

Usage: it is recommended to pay careful attention to the fabrics as they can be cut or ripped easily.

### **WOODS**

Cleaning: clean using a soft cloth, soaked in tepid water. Dry always after the cleaning. Remove immediately any liquid substances or other residue in order to prevent the absorption.

Usage: wooden surfaces, being a natural material, might be subjected to color alterations with sun exposure and use over time. It is reminded that wooden surfaces cannot endure direct heat sources.

### **METALS**

Cleaning: both steel and aluminum surfaces, and the painted ones, have to be cleaned using a soft cloth soaked in tepid water. For the most persistent stains it is possible to dilute mild soap with water moderately. Dry always after the cleaning, using a soft cloth of deer-hide. Do not use cleaning products for steel, chlorine, bleach or other strong products. It is not recommended to use abrasive, scourers, which can scratch the metal surfaces.

Usage: pay attention to the food stains as coffee, coke, fruit juices that can make indelible marks on the surfaces.

### **WARRANTY**

QUINTI guarantees the products will maintain their properties for 6 years from delivery, except normal usury and provided that they will be used according to the guidelines given. QUINTI will replace, free of charge, any product found non-compliant with this warranty, without incurring any other liability of sort. Components, external accessories or materials supplied by the buyer and applied to the products in order to customize them will not be supported by the guarantee. For an optimal maintenance of the products and to keep unchanged the characteristics of the materials with which they are made, some simple attentions are necessary.